



**A Multifunction Scale  
that doesn't just weigh!**

# ED Series

Multifunction SCALE



**Multifunction Scale!**  
Simple Weighing • Accumulating  
Counting • Checkweighing



# ED Series Multifunction Scale

## Features

- Dual Range - 4 Capacities Available
- High resolution for accurate weighing/counting
- Simple and easy operation (9 large function keys)
- Counting & percentage mode
- Accumulation mode
- Weight/Count/Percentage comparison function (HI/OK/LO) with alarm beeps
- RS-232C interface (PC/Printer)
- Rechargeable battery
- Battery Saver w/Auto Power Off
- Backlight LCD
- Options: DLP-50 Label Printer  
DEP-50 Receipt Printer  
Dust Protection Cover
- Legal for Trade - COC # 09-072  
\* Counting feature not legal for trade




The ED Series is an advanced multifunction scale, from checkweighing to counting...


## Specifications

| Model                  | ED-6  | ED-15        | ED-30       | ED-60        |               |
|------------------------|---|--------------|-------------|--------------|---------------|
| Capacity & Resolution  | lb  | 3/6 lb       | 6/15 lb     | 15/30 lb     | 30/60 lb      |
|                        |   | 0.001/0.002  | 0.002/0.005 | 0.005/0.01   | 0.01/0.02     |
|                        | oz  | 50/100 oz    | 100/200 oz  | 200/400 oz   | 500/1000 oz   |
|                        |   | 0.02/0.05    | 0.05/0.1    | 0.1/0.2      | 0.2/0.5       |
|                        | kg  | 1.5/3 kg     | 3/6 kg      | 6/15 kg      | 15/30 kg      |
|                        |   | 0.0005/0.001 | 0.001/0.002 | 0.002/0.005  | 0.005/0.01    |
|                        | g   | 1500/3000 g  | 3000/6000 g | 6000/15000 g | 15000/30000 g |
|                        |   | 0.5/1        | 1/2         | 2/5          | 5/10          |
| External Resolution    | 1/3,000   |              |             |              |               |
| Internal Resolution    | 1/60,000  |              |             |              |               |
| Display                | LCD with Backlight  |              |             |              |               |
| Display Designators    | STABLE, ZERO, NET, SUM, LO, OK, HI, pcs, lb, oz, g, kg, %, LACK OF UNIT |              |             |              |               |
| Zero Range             | +/- 2%  |              |             |              |               |
| Tare Range             | Full Capacity by Subtraction  |              |             |              |               |
| Power                  | AC adapter DC 12V/1A or 12V/800mA                                       |              |             |              |               |
|                        | Internal rechargeable sealed acid battery - 6V DC                       |              |             |              |               |
| Battery Life           | 170 hours (without backlight)   |              |             |              |               |
| Product Size (inch/mm) | 13(W) x 13.6(D) x 4.2(H) / 330(W) x 346(D) x 107(H)                     |              |             |              |               |
| Platter Size (inch/mm) | 12(W) x 8.75(D) / 300(W) x 222(D)                                       |              |             |              |               |
| Operating Temp         | -10°C ~ 40°C / 14°F ~ 104°F   |              |             |              |               |
| Product Weight         | 9.9 lbs/4.5 kg  |              |             |              |               |

## Labels & Receipt Samples

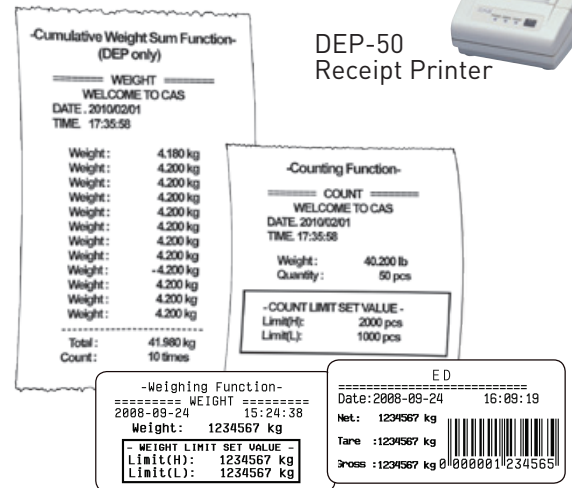

## Dimensions

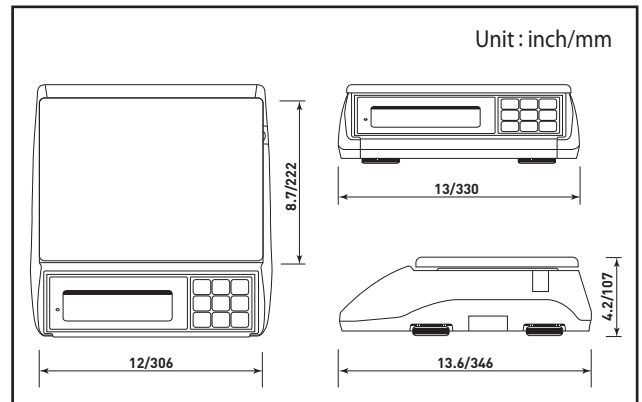

**CAS USA Corporation**  
**Corporate Office**  
 99 Murray Hill Parkway  
 East Rutherford, NJ 07073  
 Tel: (201) 933-9002  
 Fax: (201) 933-9025  
<http://www.cas-usa.com>

