


902 INDICATOR

STANDARD FEATURES:

- Smooth indicator shape with high performance PCB board, is suitable for industrial or commercial use
- Multiple weighing units: (lb/kg/oz)
- Gross/Tare/Zero
- Multiple Hold functions
- Low power design, longer battery usage
- Idle mode and automatic power off function
- Low-battery detection and warning
- 6 digits 0.7" tall LCD display with backlight
- Splash proof keyboard and display
- RS232 Output
- Print to an optima scale ticket printer
- Overload / Underload alarm
- Power saving mode
- 100% manual zero range setting
- Automatic error warning alarm
- Displays up to 50,000 graduations
- Mounting bracket and Hardware (included)
- Operates on 110V AC adapter (included) or 3 AAA Batteries (not included)
- Full Duplex RS-232 Serial Port
- Drives up to 4 350Ω load cells
- 1 Year Warranty

DIMENSIONS:

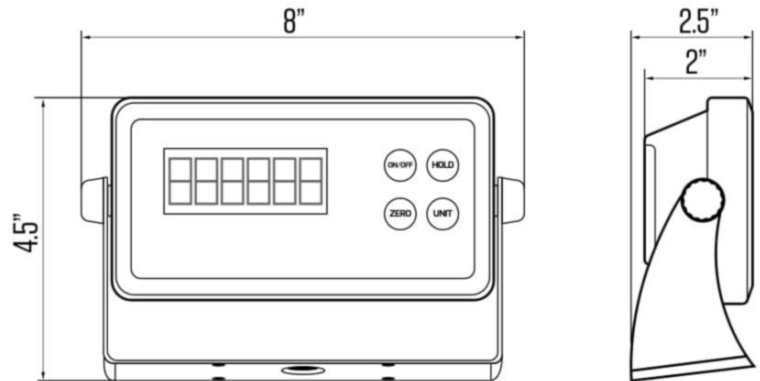

SPECIFICATIONS:

Display	6 digit 0.7" tall LCD display with backlight
Units	lb, kg (primary); oz (secondary)
Accuracy Class	OIML III, n=3000e
Resolution	120,000 dd industrial; 10,000 dd HB44
Load Cell	4 load cells of 350 Ω maximum
Load Cell Excitation	5 ± 0.5VDC
Display Resolution	Up to 1/15,000 Display Resolution
Operating Temp.	14 °F to 104 °F (-10 °C to +40 °C) ≤90%RH
Weight	1.2 lbs
Display Resolution	Up to 1/15000
Display Increment	Selectable 1, 2, 5, 10, 20, 50
Decimal Point	Selectable 0, 1, 2, 3, 4 decimal places
Tare range	2%~100% max. capacity
Initial zero range	±10% max. capacity
Manual zero range	±2% max. capacity

ACCESSORIES:

- Thermal Ticket Printer
- Stainless Steel Stand
- Painted Mild Steel Stand

