

# US-iW iWASH



## OUR SCALE GUARANTEE

- Easy to setup
- Easy to use
- Easy replacement parts
- Easy calibration/phone support
- Long warranty support
- 30 day money back guarantee
- Lowest price guarantee

**CALL NOW: 800-711-2237**



## US-IW "IWASH" BENCH SCALE NTEP (LEGAL FOR TRADE)

USA Measurements "iWash" platform scales are NTEP approved (Legal for trade) for buying or selling based on weight. The US-iWash series is stainless steel and great for wash down applications. Great for use in recycling, seafood, outdoor use, spills, wash down applications, and for customers requiring a quality scale for years to come.

### US-IW

MODEL NUMBER	CAPACITY	PLATFORM SIZE
US-i1214W	100 lb x 0.02 lb	12"x14"
US-i1620W	200 lb x 0.05 lb	16"x20"
US-i2424W	1,000 lb x 0.2 lb	24"x24"

The US-iWash series is built with a robust stainless steel frame, stainless steel column, and large stainless steel LCD indicator. Traditional bench scales are built with aluminum causing them to rust and to be easily damaged or not holding its calibration. Our "iWash" platform scale are designed with a robust steel frame, steel column, and steel indicator. This gives our scale protection against impacts, vibrations, day to day use, and holding its calibration for a long period of time. On top of that the scale is designed with a 100% overload protection, adjustable leveling feet, and a NTEP approved.


## US-E BENCH SCALE SPECIFICATIONS:



**USA Measurements**

"We Outmeasure the Competition"

- Sizes: 12"x14", 16"x20" & 24"x24"
- 100 lb, 200 lb, & 1,000 lb Capacity
- 22" Column Height on 12"
- 28" Column Height on 16" & 24"
- Wash Down Safe IP67
- 100% Overload Protection
- Leveling Bubble on Frame
- (4) Adjustable Leveling Feet
- Stainless Steel Load Cell
- Safety Screws for Protection
- Arrives Calibrated (Plug & Weigh)
- 304 Graded Stainless Steel Pan
- 2 Year Manufacturer Warranty
- NTEP Approved 19-134A1 (Legal for trade)

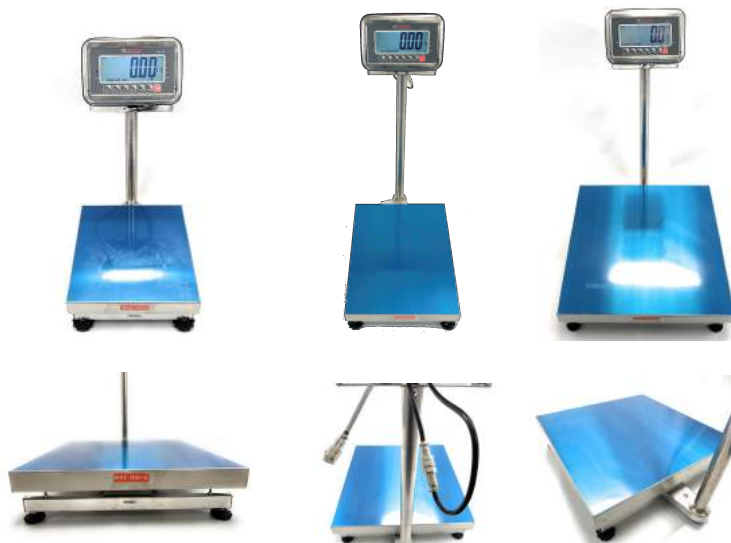

## US-2011SS INDICATOR FEATURES:

- Stainless Steel LCD Backlight Display
- 2" LCD Digit Size
- 30,000 Divisions
- Units: LB or KG
- 110V Power Adapter
- 6V/4Ah Rechargeable Battery
- Accumulation Function
- Animal Weigh Function
- Check weigh Function (Hi/Ok/Lo)
- RS-232 Output
- Powers (4) 350 ohm Load Cells
- Operating Temp: -10°C to 40°C (14°F to 104°F)
- NTEP Approved 19-132A1 (Legal for trade)

