



Weighing Technology


HJK Series

17,000 g x 0.1 g

33,000 g x 0.1 g



- IP 65 Washdown & Dustproof Rated
- RS 232 Capability
- GLP Standard
- Counting, Percentage & Checkweighing
- Pillar Kit Optional
- GMP/GLP Standard
- Internal Calibration
- Tuning Fork Technology

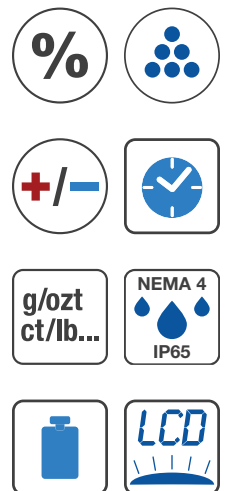

Made in Japan



Weighing Technology

HJK Series

A Higher Level of Precision....A Higher Level of Performance

Model	HJK 17K	HJK 33K
Capacity	17,000 g	33,000 g
Readability	0.1 g	0.1 g
Displayed Divisions	170,000	330,000
Internal Counting Resolution	170,000	330,000
Weighing Units / Functions	g, lb, pcs, ct, oz, ozt, kg	g, lb, pcs, ct, oz, ozt, kg
Stabilization Time	< 1-5 seconds	< 1-5 seconds
Tare Range	Subtractive Tare	Subtractive Tare
Power Source	12VDC, Optional Rechargeable Battery	12VDC, Optional Rechargeable Battery
Construction	IP65 Stainless Steel	IP65 Stainless Steel
Connectivity	RS232 Serial	RS232 Serial
Pan Size	15.75" x 13.75" / 400 mm x 350 mm	15.75" x 13.75" / 400 mm x 350 mm
Dimensions (W x D x H)	25.7" x 6.7" / 652 mm x 170 mm	25.7" x 6.7" / 652 mm x 170 mm
Operating Environment	5-35°C, RH 80%	5-35°C, RH 80%
Net Weight	40 lb / 18 kg	40 lb / 18 kg
Shipping Weight	53 lb / 24 kg	53 lb / 24 kg
Options	Relay Output, Printer, Rechargeable Battery, Pillar Kit.	Relay Output, Printer, Rechargeable Battery, Pillar Kit.

Features	Benefits
Checkweighing	Set HI-LO-GO in any weighing unit
IP65 Washdown / Dustproof	Can be used in harsh environments
Free Key Setting	Set shortcuts to desired applications
GLP Standard	Date, Time, User ID, Net, Gross, Header
Tuning Fork Technology	Little to no warm up time
RS232	Connect to peripheral for data collection
Weighing Stability	Can adjust zero tracking & response spec
Bar Graph	Allows user to note when reaching full capacity
Internal Calibration	No external weights needed