

US-BT "BENCHTEK" STAINLESS STEEL FLOOR SCALE



OUR SCALE GUARANTEE

- Easy to setup
- Easy to use
- Easy replacement parts
- Easy calibration/phone support
- Easy warranty support
- 30 day money back guarantee
- Lowest price guarantee

CALL NOW: 800-711-2237



INDICATOR FEATURES

- Includes US-6011SS LCD Indicator
- Units: lb, kg, oz, lb:oz, g
- Stainless Steel Enclosure
- Counting Pieces Function
- Accumulation Weighing
- Overload /Unload Alarm
- 1" Digits with LCD Backlight
- Gross/Tare/Pre-Set Tare/Zero
- Built in Rechargeable Battery
- Includes Mounting bracket & hardware
- NTEP Approved – Class III (Legal for trade)



US-BT "BENCHTEK"

USA Measurements "BenchTek" is ideal for customers that need an NTEP approved (Legal for trade) scale. This certification allows a user to buy or sell based on weight. The US-BT is built with a robust 304 graded stainless steel frame, stainless steel digital indicator, 100% overload protection, and has our 5 year warranty. This model scale is great for all wash down applications, outdoor use, and customers that need a reliable, accurate, and durable scale for years to come.

PLATFORM FEATURES

- Stainless Steel Single Point Load Cell
- Stainless Steel Platter
- 100% Overload Protection
- Stainless Steel Column for Indicator
- Low Profile Design
- Stainless Steel Adjustable Leveling Feet
- Warranty: 5 Year on Steel Frame
- Warranty: 2 Year on Electronics
- Easy to Calibrate Digital Indicator
- NTEP Approved – Class III (Legal for trade)

MODELS

US-BT1414SS-100

14"x14" Platform 100 lb x .02 lb Capacity

US-BT1818SS-300

18"x18" Platform 300 lb x .05 lb Capacity

US-BT1620SS-400

16"x20" Platform 400 lb x .05 lb Capacity

US-BT2020SS-400


20"x20" Platform 400 lb x .05 lb Capacity

US-BT2424SS-500

24"x24" Platform 500 lb x 0.1 lb Capacity

US-BT2424SS-1K

24"x24" Platform 1,000 lb x 0.2 lb Capacity

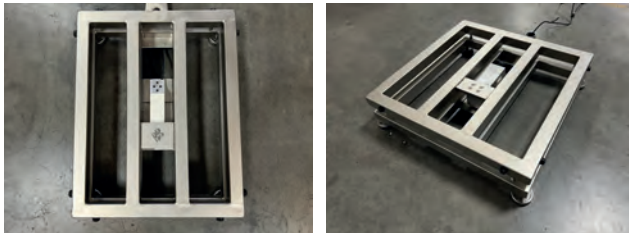

OPTIONAL ACCESSORIES

- Thermal Printer
- Label Printer
- Indoor Remote Display 3" Digits
- Indoor Remote Display 5" Digits
- Outdoor Remote Display 6" Digits
- Software
- Certificate of Calibration
- Intrinsically Safe Indicator
- Indicator with 4-20ma Output
- Indicator with Setpoint / Relay Function

