

Application Worksheet

Company/End User:
Contact
Address:
Phone:
Fax:
E-mail:
Sales Organization
Salesperson

Product Details:


Preferred Measurement = **Must Check Two** Inches Millimeters Grams Lbs.

Liquid: Solid: Misc. Components:


Opened: yes no

Controlled Spacing: yes no

Gap between products:

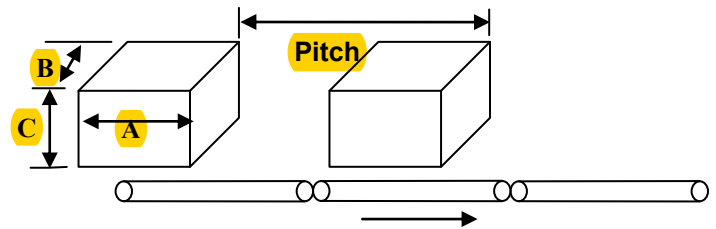

Container Type & Contents		Required	Required	Required	Pitch =	Required	Required	Required
		A = Length	B = Width	C = Height	leading edge to leading edge	Speed Packs. / min. (PPM)	Product Weight	Accuracy
	Min.							
	Max.							
	Min.							
	Max.							

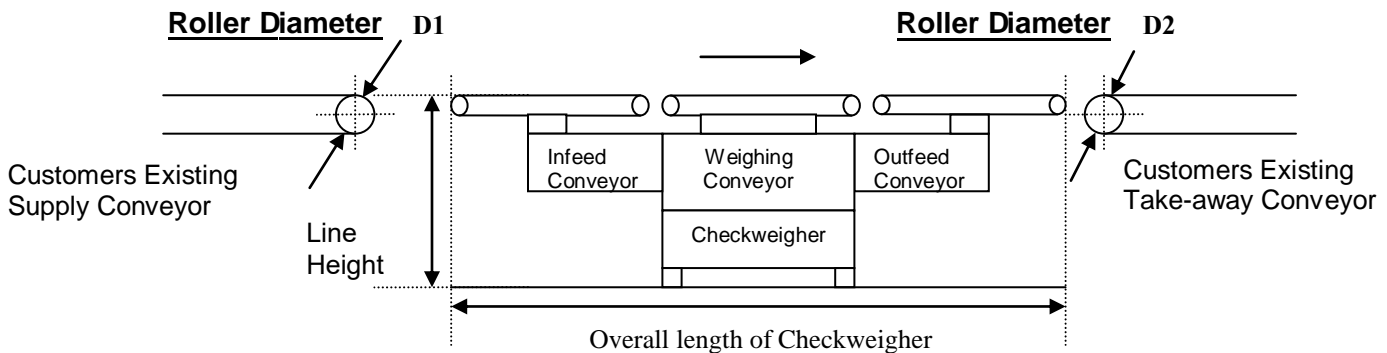

Overall Available Footprint:		Working Direction: Left to Right Right to Left	
Line Height:	Infeed Line Speed:	Infeed Width:	
(Standard Stainless-Steel Frames) Stainless-Steel Components:		Anodized Aluminum Components:	

Purpose of Checkweigher:

Inspection for Under/Overweight Packages
Check Package Quantity
Acquisition of Production Data
Shipping or Receiving
Production Reports (Provide Details)
Other _____

Working Environment:

Temperature

Relative Humidity

Location:

Ground floor 2nd floor Mezzanine

Airflow yes no

Vibration yes no

Air Conditioning yes no

Cleaning:

No cleaning (IP45)

Air Pressure (IP54)

Wet Rag (IP55)

Water Pressure (IP65)

Steam & Water (IP67)

Frequency:

Once a month

Once a week

Once a day

Once a Shift

Solvents Used

Preferred Power Supply:

110V/120V

220V/240V

460V/480V

1 Ph

3 Ph

Air Pressure Min.

Max.

Options:

Additional Speed up belt for product spacing

Spacing Wheel for product spacing

Reject Device (Type)

Touch Screen HMI Controls

Guide Rails

Draft Shield

Indicator (Red, Amber, Green)

Feedback to Filler

Remote Mounted Display

Portable Caster Package

Sortation

Metal Detection

Barcode Scanner

Labeling / Print & Apply

Interface Devices:

RS-232

Ethernet TCP/IP

Ethernet IP

How is Data Being Used

SPECIAL INSTRUCTIONS: