



USA MEASUREMENTS • MODEL US-C2000SS

Stainless Steel Digital Crane Scale

Heavy-duty stainless steel housing with bright green LED display.
Designed for industrial lifting, recycling, freight, and outdoor applications.
Arrives factory-calibrated and ready to use.

2-Year Warranty

Weather Resistant

Pre-Calibrated

Non-NTEP

KEY FEATURES

- ▶ Stainless steel housing — corrosion resistant, easy to wipe clean
- ▶ Bright green LED display — readable indoors and outdoors
- ▶ Built-in rechargeable battery + AC/DC adapter included
- ▶ Full-capacity tare function
- ▶ Units: LB and KG selectable
- ▶ Alloy steel load cell for reliable, repeatable accuracy
- ▶ US-WFX handheld remote display included
- ▶ Factory calibrated — ready to use out of the box
- ▶ 2-year warranty on frame and electronics
- ▶ All-weather construction for outdoor use

SPECIFICATIONS

Model	US-C2000SS
Capacity	2,000 lb / 907 kg
Readability	0.5 lb / 0.2 kg
Unit Weight	7 lb (3.2 kg)
Display	Green LED, 1" digits
Remote	US-WFX handheld
Load Cell	Alloy steel
Power	Rechargeable + AC/DC
Tare	Full capacity
Units	LB / KG
Housing	Stainless steel
Weather	All-weather rated
Calibration	Factory calibrated
NTEP	Non-NTEP
Warranty	2 years



COMMON APPLICATIONS


- ✓ Overhead crane weighing
- ✓ Recycling & scrap yards
- ✓ Freight & shipping
- ✓ Container weighing
- ✓ Forestry & logging
- ✓ Agriculture & livestock
- ✓ Construction
- ✓ Marine & offshore
- ✓ Warehousing
- ✓ Industrial lifting

USA MEASUREMENTS • MODEL US-C2000SS

Physical Dimensions

All dimensions in inches — millimeters shown for reference

REFERENCE DIAGRAM

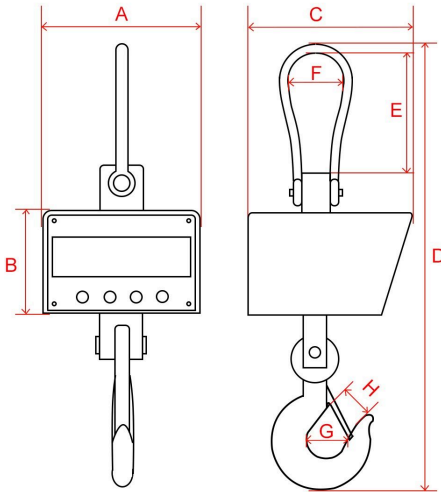

C (Housing Depth) is measured front-to-back and is not shown in front view above.

DIMENSION REFERENCE TABLE — US-C2000SS

Ref	Dimension	Inches	mm
A	Housing Width	4.92"	125 mm
B	Housing Height	3.54"	90 mm
C	Housing Depth	4.72"	120 mm
D	Overall Hung Length (top to bottom)	14.17"	360 mm
E	Top Shackle Height	2.01"	51 mm
F	Top Shackle Inner Opening	1.65"	42 mm
G	Bottom Hook Opening	1.30"	33 mm
H	Bottom Hook Wire Diameter	1.06"	27 mm
—	Unit Weight	8.6 lb	3.9 kg

Note: Capacity is 2,000 lb / 907 kg with 0.5 lb / 0.2 kg readability. All dimensions are nominal. Minor manufacturing tolerances may apply. Contact us with any pre-purchase questions: **702-970-4414** or **sales@primeusascales.com**

Prime USA Scales / USA Measurements

3915 W Hacienda Ave, Suite A103 & A117 • Las Vegas, NV 89118
702-970-4414 • sales@primeusascales.com • primeusascales.com

Call or order online
primeusascales.com