


C A M B R I D G E



MODEL SS660 SERIES STAINLESS STEEL LOW PROFILE FLOOR SCALES

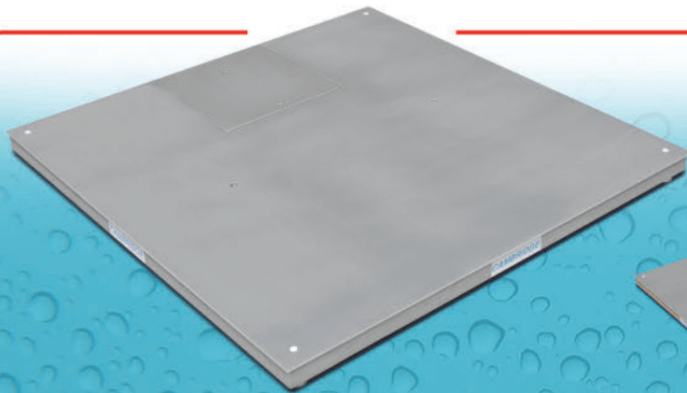

Model SS660-OB features an ON-BOARD junction box

Applications:

- Pharmaceutical
- Harsh Environment
- Food Processing
- Washdown Environment
- Batching/Filling
- General Purpose Weighing

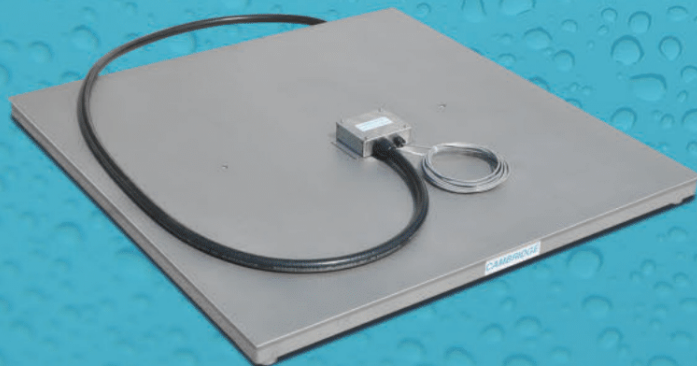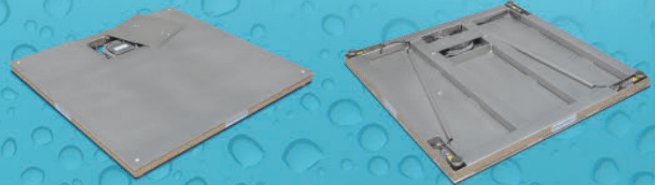

Model SS660-R features a REMOTE junction box



Optional Cambridge
Model SSCSW-20AT
indicator.


Model SS660-OB Features:

- “ON-BOARD” stainless steel NEMA IV, water seal rated junction box
- Smooth plate stainless steel Type 304
- Stainless steel Type 304 construction
- Capped and sealed stainless steel structural tubing
- Stainless steel IP67 waterseal rated load cells
- 20 ft. shielded signal cable
- Eye bolt lift holes for easy set-up
- 100% end loading protection
- 200% overload & shock load protection
- Easy access leveling

Model SS660-R Features:

All of the above except with-

- “REMOTE” stainless steel NEMA IV, water seal rated junction box and 10' Sealite flex conduit

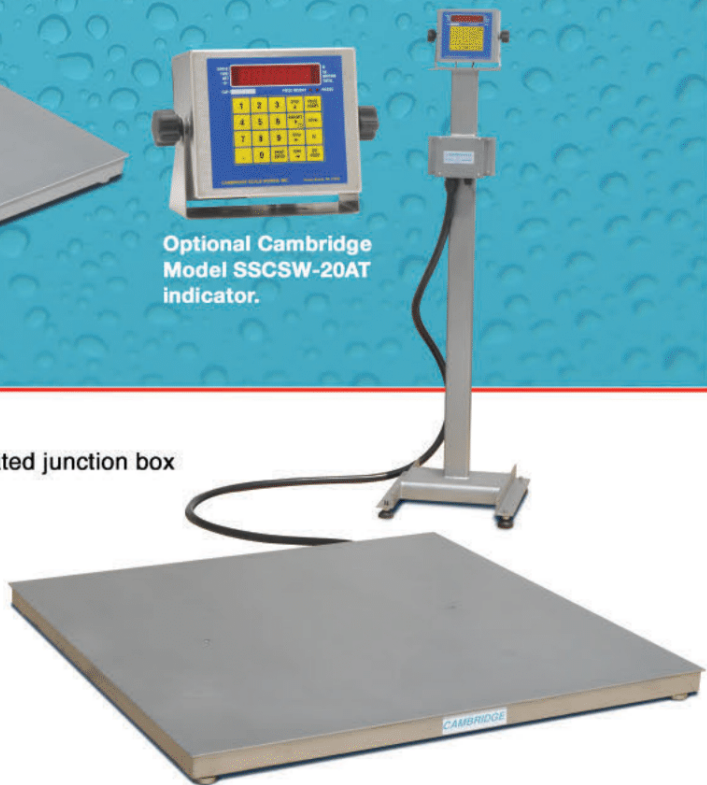

Model SS660-R shown with optional stainless steel free standing indicator column and Cambridge Model SSCSW-20AT indicator.

Approvals:



COC# 96-157A1



Members:


- THE NATIONAL CONFERENCE ON WEIGHTS AND MEASURES
- THE INTERNATIONAL SOCIETY OF WEIGHING AND MEASUREMENT

C A M B R I D G E


MODEL SS660 SERIES STAINLESS STEEL LOW PROFILE FLOOR SCALES

| Model SS660 Specifications (Standard Sizes) | | | | | |
|---|--------------|-------------|--|--------------|-------------|
| SIZE | CAPACITY | SHIP WEIGHT | SIZE | CAPACITY | SHIP WEIGHT |
| 24" x 24" x 3" | 1,000 lb. | 95 lb. | 48" x 60" x 3" | 5,000 lb. * | 385 lb. |
| | 2,500 lb. | 95 lb. | | 10,000 lb. * | 490 lb. |
| 30" x 30" x 3" | 1,000 lb. | 125 lb. | 48" x 72" x 3" | 5,000 lb. * | 465 lb. |
| | 2,500 lb. | 125 lb. | | 10,000 lb. * | 585 lb. |
| 36" x 36" x 3" | 1,000 lb. | 180 lb. | 60" x 60" x 3" | 5,000 lb. * | 485 lb. |
| | 2,500 lb. | 180 lb. | | 10,000 lb. * | 600 lb. |
| | 5,000 lb. | 180 lb. | 60" x 60" x 4" | 20,000 lb. * | 855 lb. |
| 48" x 48" x 3" | 1,000 lb. | 250 lb. | 60" x 84" x 4" | 10,000 lb. * | 1,140 lb. |
| | 2,500 lb. | 250 lb. | | 20,000 lb. * | 1,380 lb. |
| | 5,000 lb. * | 250 lb. | * NTEP Approved Custom sizes available. Consult factory | | |
| | 10,000 lb. * | 375 lb. | | | |

Model SS660 Stainless Steel Options:




Diamond deck plate



Type 316 construction



Hermetically sealed and/or "FM" approved load cells




48" Indicator column (attached)



Captive ball leveling feet

Model SS660 Stainless Steel Accessories:



Ramp



Pit form



Bumper guard



Bumper guard surround




48" Indicator column (Free standing)



Lag down bracket (sold individually)



Portability cart

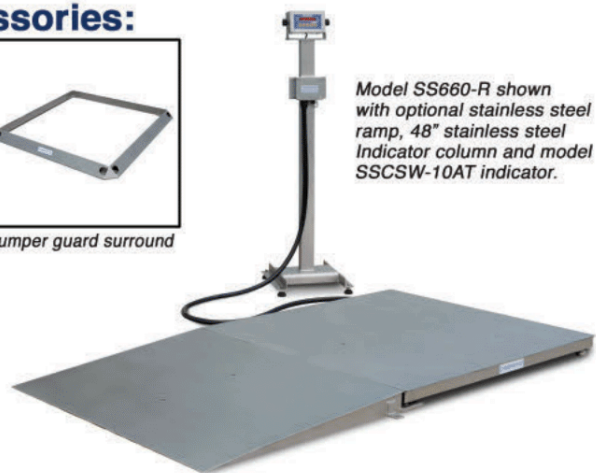

Model SS660-R shown with optional stainless steel ramp, 48" stainless steel indicator column and model SSCSW-10AT indicator.

Cambridge Scale Works, Inc.
will warrant this product for
one full year against defects
in material and/or workmanship.