



USA MEASUREMENTS • MODEL US-BL20KSS-P

Stainless Steel "Big Lift" Crane Scale with Printer

Heavy-duty 304 stainless steel crane scale with wireless handheld display and built-in thermal printer. Designed for high-capacity industrial lifting, recycling, freight, and marine applications. Factory-calibrated and ready to use.

2-Year Warranty

Waterproof

Includes Printer

Non-NTEP

KEY FEATURES

- ▶ 304 stainless steel housing — waterproof, dustproof, anti-corrosion
- ▶ US-WFX wireless handheld display with integrated thermal printer
- ▶ Print weight tickets on demand — eliminates manual recording
- ▶ 5-digit super bright display — clear reading in direct sunlight
- ▶ Built-in 8,000 mAh rechargeable battery + AC/DC adapter
- ▶ High-precision alloy steel load cell for reliable accuracy
- ▶ Full-capacity tare / peeling function
- ▶ 6.14 mm thickened steel plate construction
- ▶ Factory calibrated — ready to use out of the box
- ▶ 2-year warranty on frame and electronics

SPECIFICATIONS

Model	US-BL20KSS-P
Capacity	20,000 lb / 9,072 kg
Readability	5 lb / 2 kg
Display	US-WFX Wireless Handheld Display + Thermal Printer
Units	LB / KG
Load Cell	Alloy steel
Power	8,000 mAh battery + AC/DC
Tare	Full capacity
Housing	304 Stainless steel (6.14 mm)
Weather	Waterproof / dustproof
Calibration	Factory calibrated
NTEP	Non-NTEP
Warranty	2 years



COMMON APPLICATIONS

- ✓ Overhead crane weighing
- ✓ Recycling & scrap yards
- ✓ Freight & shipping
- ✓ Container & cargo weighing
- ✓ Forestry & logging
- ✓ Steel & metal fabrication
- ✓ Construction
- ✓ Marine & offshore
- ✓ Warehousing
- ✓ Industrial lifting

Prime USA Scales / USA Measurements

3915 W Hacienda Ave, Suite A103 & A117 • Las Vegas, NV 89118
702-970-4414 • sales@primeusascales.com • primeusascales.com


Call or order online
primeusascales.com

USA MEASUREMENTS • MODEL US-BL20KSS-P

Physical Dimensions

All dimensions in inches — millimeters shown for reference

REFERENCE DIAGRAM

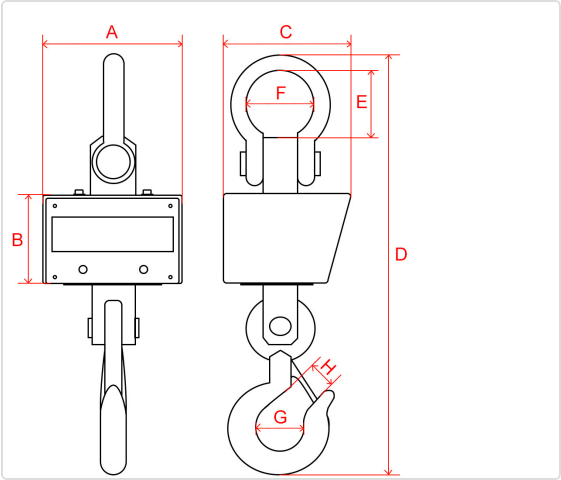

DIMENSION REFERENCE TABLE — US-BL20KSS-P

Ref	Dimension	Inches	mm
A	Housing Width	6.85"	174 mm
B	Housing Height	4.33"	110 mm
C	Housing Depth	5.55"	141 mm
D	Overall Hung Length (top to bottom)	28.15"	715 mm
E	Top Shackle Height	4.72"	120 mm
F	Top Shackle Inner Opening	3.54"	90 mm
G	Bottom Hook Opening (gap)	2.68"	68 mm
H	Bottom Hook Wire Diameter	2.17"	55 mm
—	Unit Weight	50.7 lb	23 kg

Note: Capacity is 20,000 lb / 9,072 kg with 5 lb / 2 kg readability. All dimensions are nominal. Minor manufacturing tolerances may apply. Questions? Call **702-970-4414** or email **sales@primeusascales.com**