



USA MEASUREMENTS • MODEL US-BL6KSS

Stainless Steel "Big Lift" Crane Scale

Heavy-duty 304 stainless steel crane scale with US-WFX wireless handheld display. Designed for high-capacity industrial lifting, recycling, freight, and marine applications. Factory-calibrated and ready to use.

2-Year Warranty

Waterproof

Pre-Calibrated

Non-NTEP

KEY FEATURES

- ▶ 304 stainless steel housing — waterproof, dustproof, anti-corrosion
- ▶ US-WFX wireless handheld display — read weight from up to 300 ft away
- ▶ 5-digit super bright display — clear reading in direct sunlight
- ▶ Built-in 8,000 mAh rechargeable battery + AC/DC adapter
- ▶ High-precision alloy steel load cell for reliable accuracy
- ▶ Full-capacity tare / peeling function
- ▶ 6.14 mm thickened steel plate construction
- ▶ Auto sleep mode for battery conservation
- ▶ Factory calibrated — ready to use out of the box
- ▶ 2-year warranty on frame and electronics

SPECIFICATIONS

Model	US-BL6KSS
Capacity	6,000 lb / 2,722 kg
Readability	1 lb / 0.5 kg
Display	US-WFX Wireless Handheld Display
Units	LB / KG
Load Cell	Alloy steel
Power	8,000 mAh battery + AC/DC
Tare	Full capacity
Housing	304 Stainless steel (6.14 mm)
Weather	Waterproof / dustproof
Calibration	Factory calibrated
NTEP	Non-NTEP
Warranty	2 years



COMMON APPLICATIONS

- ✓ Overhead crane weighing
- ✓ Recycling & scrap yards
- ✓ Freight & shipping
- ✓ Container & cargo weighing
- ✓ Forestry & logging
- ✓ Steel & metal fabrication
- ✓ Construction
- ✓ Marine & offshore
- ✓ Warehousing
- ✓ Industrial lifting

Prime USA Scales / USA Measurements

3915 W Hacienda Ave, Suite A103 & A117 • Las Vegas, NV 89118
702-970-4414 • sales@primeusascales.com • primeusascales.com


Call or order online
primeusascales.com

USA MEASUREMENTS • MODEL US-BL6KSS

Physical Dimensions

All dimensions in inches — millimeters shown for reference

REFERENCE DIAGRAM

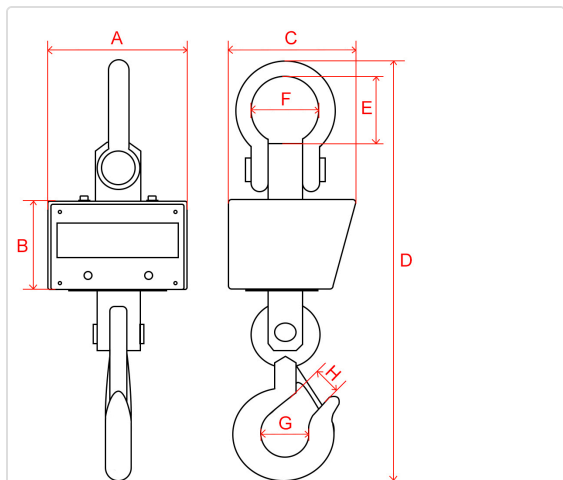

DIMENSION REFERENCE TABLE — US-BL6KSS

Ref	Dimension	Inches	mm
A	Housing Width	6.85"	174 mm
B	Housing Height	4.33"	110 mm
C	Housing Depth	5.55"	141 mm
D	Overall Hung Length (top to bottom)	20.35"	517 mm
E	Top Shackle Height	3.27"	83 mm
F	Top Shackle Inner Opening	2.68"	68 mm
G	Bottom Hook Opening (gap)	1.77"	45 mm
H	Bottom Hook Wire Diameter	1.50"	38 mm
—	Unit Weight	24.3 lb	11 kg

Note: Capacity is 6,000 lb / 2,722 kg with 1 lb / 0.5 kg readability. All dimensions are nominal. Minor manufacturing tolerances may apply. Questions? Call **702-970-4414** or email sales@primeusascales.com

Prime USA Scales / USA Measurements

3915 W Hacienda Ave, Suite A103 & A117 • Las Vegas, NV 89118
702-970-4414 • sales@primeusascales.com • primeusascales.com

Call or order online
primeusascales.com