primeusascales.com | sales@primeusascales.com | 702-970-4414
4445 Harmon Cove Ct, Suite 7 · Las Vegas, NV 89103



USA MEASUREMENTS • MODEL US-C1000SS

Stainless Steel Digital Crane Scale

Heavy-duty stainless steel housing with bright green LED display. Designed for industrial lifting, recycling, freight, and outdoor applications. Arrives factory-calibrated and ready to use.

2-Year Warranty | Weather Resistant | Pre-Calibrated | Non-NTEP

KEY FEATURES

- Stainless steel housing — corrosion resistant, easy to wipe clean
- Bright green LED display — readable indoors and outdoors
- Built-in rechargeable battery + AC/DC adapter included
- Full-capacity tare function
- Units: LB and KG selectable
- Alloy steel load cell for reliable, repeatable accuracy
- US-WFX handheld remote display included
- Factory calibrated — ready to use out of the box
- 2-year warranty on frame and electronics
- All-weather construction for outdoor use

SPECIFICATIONS

Model	US-C1000SS
Capacity	1,000 lb / 454 kg
Readability	0.5 lb / 0.2 kg
Unit Weight	7 lb (3.2 kg)
Display	Green LED, 1" digits
Remote	US-WFX handheld
Load Cell	Alloy steel
Power	Rechargeable + AC/DC
Tare	Full capacity
Units	LB / KG
Housing	Stainless steel
Weather	All-weather rated
Calibration	Factory calibrated
NTEP	Non-NTEP
Warranty	2 years






COMMON APPLICATIONS

✓ Overhead crane weighing ✓ Recycling & scrap yards ✓ Freight & shipping ✓ Container weighing ✓ Forestry & logging
✓ Agriculture & livestock ✓ Construction ✓ Marine & offshore ✓ Warehousing ✓ Industrial lifting


primeusascales.com | sales@primeusascales.com | 702-970-4414
4445 Harmon Cove Ct, Suite 7 · Las Vegas, NV 89103

USA MEASUREMENTS • MODEL US-C1000SS

Physical Dimensions

All dimensions in inches — millimeters shown for reference

REFERENCE DIAGRAM

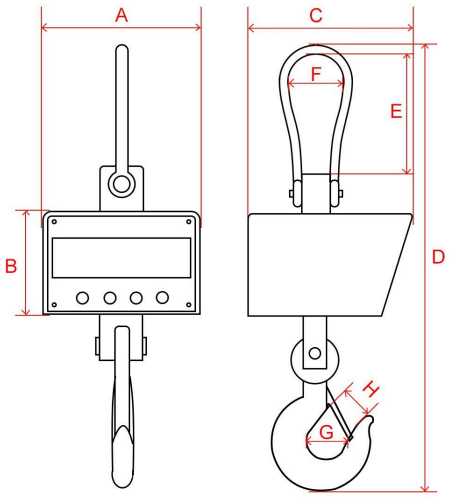

C (Housing Depth) is measured front-to-back and is not shown in front view above.

DIMENSION REFERENCE TABLE — US-C1000SS

Ref	Dimension	Inches	mm
A	Housing Width	**4.92"**	125 mm
B	Housing Height	**3.54"**	90 mm
C	Housing Depth	**4.72"**	120 mm
D	Overall Hung Length (top to bottom)	**12.99"**	330 mm
E	Top Shackle Height	**2.01"**	51 mm
F	Top Shackle Inner Opening	**1.65"**	42 mm
G	Bottom Hook Opening	**0.98"**	25 mm
H	Bottom Hook Wire Diameter	**0.83"**	21 mm
—	Unit Weight	**7.3 lb**	3.3 kg

Note: Capacity is 1,000 lb / 454 kg with 0.5 lb / 0.2 kg readability. All dimensions are nominal. Minor manufacturing tolerances may apply. Contact us with any pre-purchase questions: **702-970-4414** or **sales@primeusascales.com**